

# Driveman 720 Limited Warranty

Driveman720 has a limited warranty. In case of malfunction, our service station will repair or exchange at no charge. Shipping the unit to the repair facility is the customer's responsibility. The following items are not covered by the Limited Warranty

1. Evidence of abuse, self repair or modification is present..
2. Unit has been dropped or water damaged.
3. Damage caused by natural disaster: earthquake, act of God, storm, lightning or natural calamities.
4. When used for any other purpose than car mounted use..
5. Normal wear and tear
6. Customer travel to repair facility
7. Industrial or commercial use.
8. Defect or damage caused by connecting to any other device or any unintended use.

This warranty is valid only in the country where purchased. This warranty is limited to the Driveman only. ARC is not responsible for any incidental or consequential damages, or memory loss or other damages for any reason, ARC's responsibility is limited to the Driveman product alone. While this product may help in analyzing an accident site, ARC does not represent that the images could be used as evidence

User name	Name Address  Phone
term of a guarantee	one year from a date of purchase
Date of purchase	
Store name	Store name Store address
Serial number	

Driveman Div. Asahi Research Corporation  
8-3-13 Nisi-Gotanda, Sinagawaku, Tokyo, Japan 1410031  
<http://www.driveman.jp> support@driveman.jp




## Driveman® 720 Instruction

Thank you for purchasing the Driveman720. Please take a minute to read the Safety Precautions. These Instructions explain how to properly use the Driveman720. The Warranty card should be kept for service if required.


Copyright (C) 2010 ASAHI RESEARCH CORPORATION. All Rights Reserved.

### Contents of package


The following items are provided in this package. (Appearance may vary slightly from the illustrations).

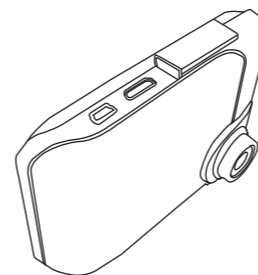


Driveman Unit 1 piece

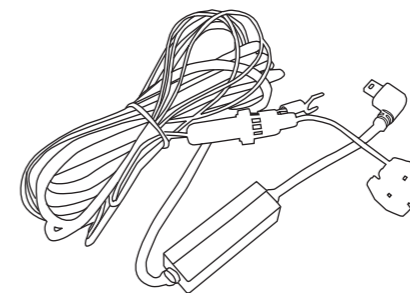


Car mounting assembly 1 piece




Bracket (with adhesive tape) 1 piece

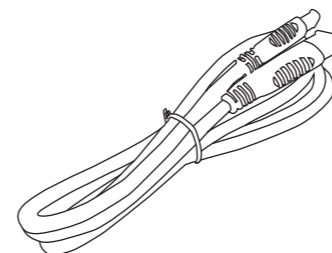


HDMI cable 1 piece

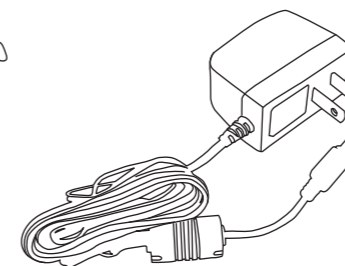

AC adaptor 1 piece



SD card 4GB 1 piece



Instruction sheet 1 sheet

## Safety Precautions

The following are important safety precautions for the user

### Meaning of marks

⚠ Must do.

⊘ Must Never do.

⚠ Connect the power cable securely, half exposed live contact may heat up and could start a fire.

⊘ Never break, modify, twist, bend excessively, yank or heat the power cable.

⊘ Never jar or impact the LCD panel. This could break the Panel and cause fire or injury..

⊘ When power cable needd to be disconnected, always pull the Plug and not the wire.. Pulling the wire could break it and cause fire or injury..

⚠ Mount the unit at the proper position. Wrong mounting may result in the unit malfunctioning or may block the driver's visibility .or the unit may fall during driving.

⚠ Power cable is be connected to DC12V or DC24V ACCESSORY terminal.

⚠ In the case of smoke or burning odor coming from the unit, stop your car at a safe place and shut the engine off, then disconnect the unit from power connection.

⊘ Never touch the unit or the power cable with wet hands. Never expose the unit to rain or other liquids. A short circuit may cause fire or electrical shock.

⊘ Never disassemble the unit. Never modify the unit. Fire, electronic shock or malfunction could result and your Warranty would be voided.

⊘ Never attempt to operate the controls or any settings during driving.. This must only be done while the car is parked..

### Driveman720 Specifications

Image sensor	5 megapixel CMOS	2592x1944
Image quality	HD	1280x720
File type	.MOV	AVC/H.264
Video Frame rate	fixed	27.5fps
Record mode	Automatic REC	Manual REC override
Internal memory	32MB as firmware	
External memory	SD card (SDHC)	Max. 32GB
File size (ea.)	5 minute file	Approx. 180MB
File to file gap	Write process time	Less than 0.05 sec.
Language	Japanese / English selectable	
LCD display	2.4 inch color LCD	
Control buttons	3 pieces	Push 2 buttons, Joy stick 1
Video angle	H 107 degree V 50 degree	Diagonal 120 degree
Lens	F/1.6 fixed focus	
Operation Temperature range	0°C ~ +70°C	
Storage Temperature range	-20°C ~ +80°C	
Power supply voltage range	Car mount harness	DC12V or DC24V
Power consumption rate	1 A	
White balance	Auto	
Exposure control	Auto	
Microphone	Built in rear side	
Speaker	No	
Day and time indication	Image lower right corner	
Clock power supply	Super capacitor	Approx. 1 week life without power
Internal storage power	Super capacitor	Final file closing power
LED display	Green: power on	Red: REC in process
Video output	HDMI 1 connector	
Size	68x105x35mm	
Weight	Approx. 100 grams	

## Guide to getting support

Internet mail  
support@driveman.jp

Web page  
<http://www.driveman.jp>

Customer service center  
TEL 03-3779-1792  
Working hour: 10:00 to 12:30 and 13:30 to 17:00  
(closed on Saturday, Sunday, National Holidays)

### Driveman Division

Asahi Research Corporation  
8-3-13 Nisi-Gotanda, Sinagawaku, Tokyo, Japan 1410031  
Any personal information obtained by customer service department shall be used for servicing and consulting with customer service department and shall never be used for any other purpose.